

EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.



# SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.



REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED

NOTES:

1. INLET & OUTLET FLANGES ARE 6" CLASS D FF PER AWWA C207-07 REQUIRING 8X  $\phi$ 3/4" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82°C).
4. PRESSURE LOSS: 3-15 psid (.21-1.03 bar) AT RATED FLOW.
5. RATED FLOW: 550-1200 gpm (125-273 m<sup>3</sup>/hr).
6. APPROXIMATE DRY WEIGHT: 1128 lbs (503 kg).
7. FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005 (EXTERIOR ONLY).
8. CERTIFIED UNDER NSF/ANSI STANDARD NSF 61 & ANNEX G.

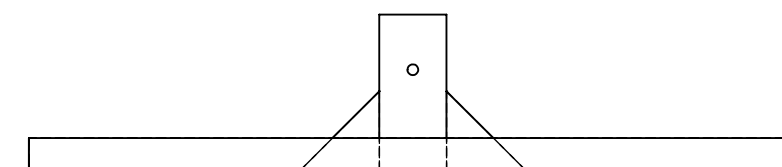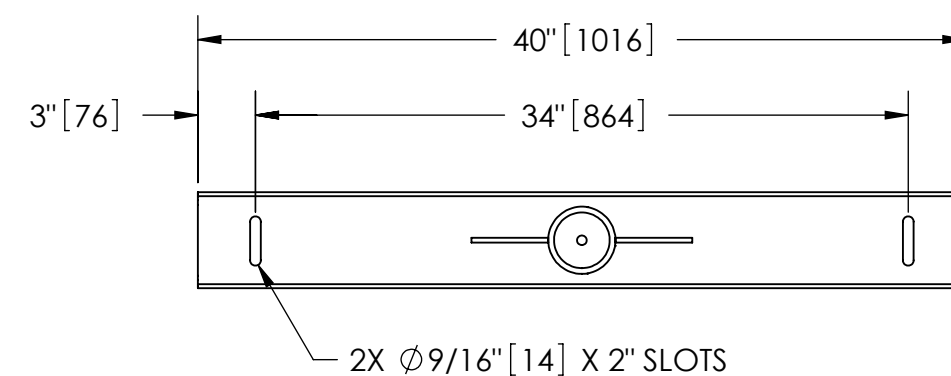

SECTION B-B

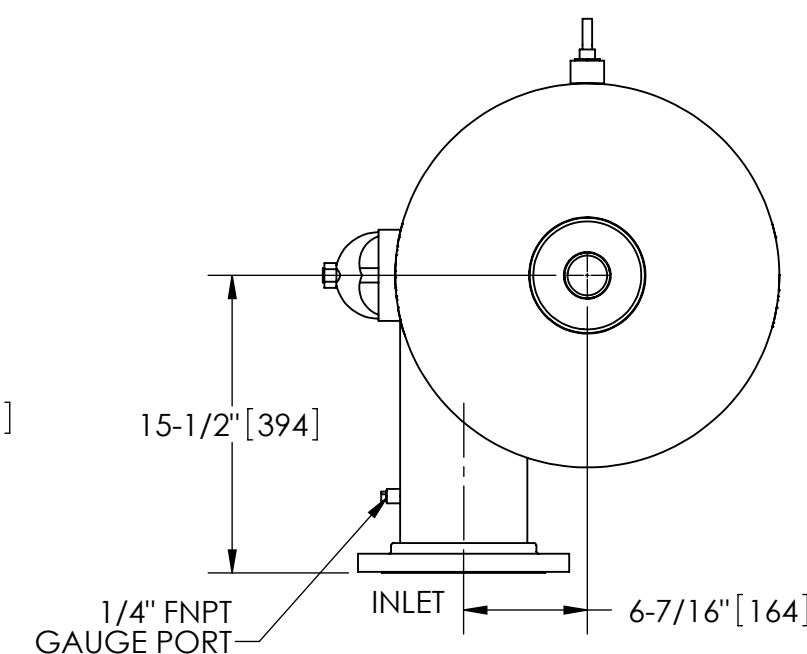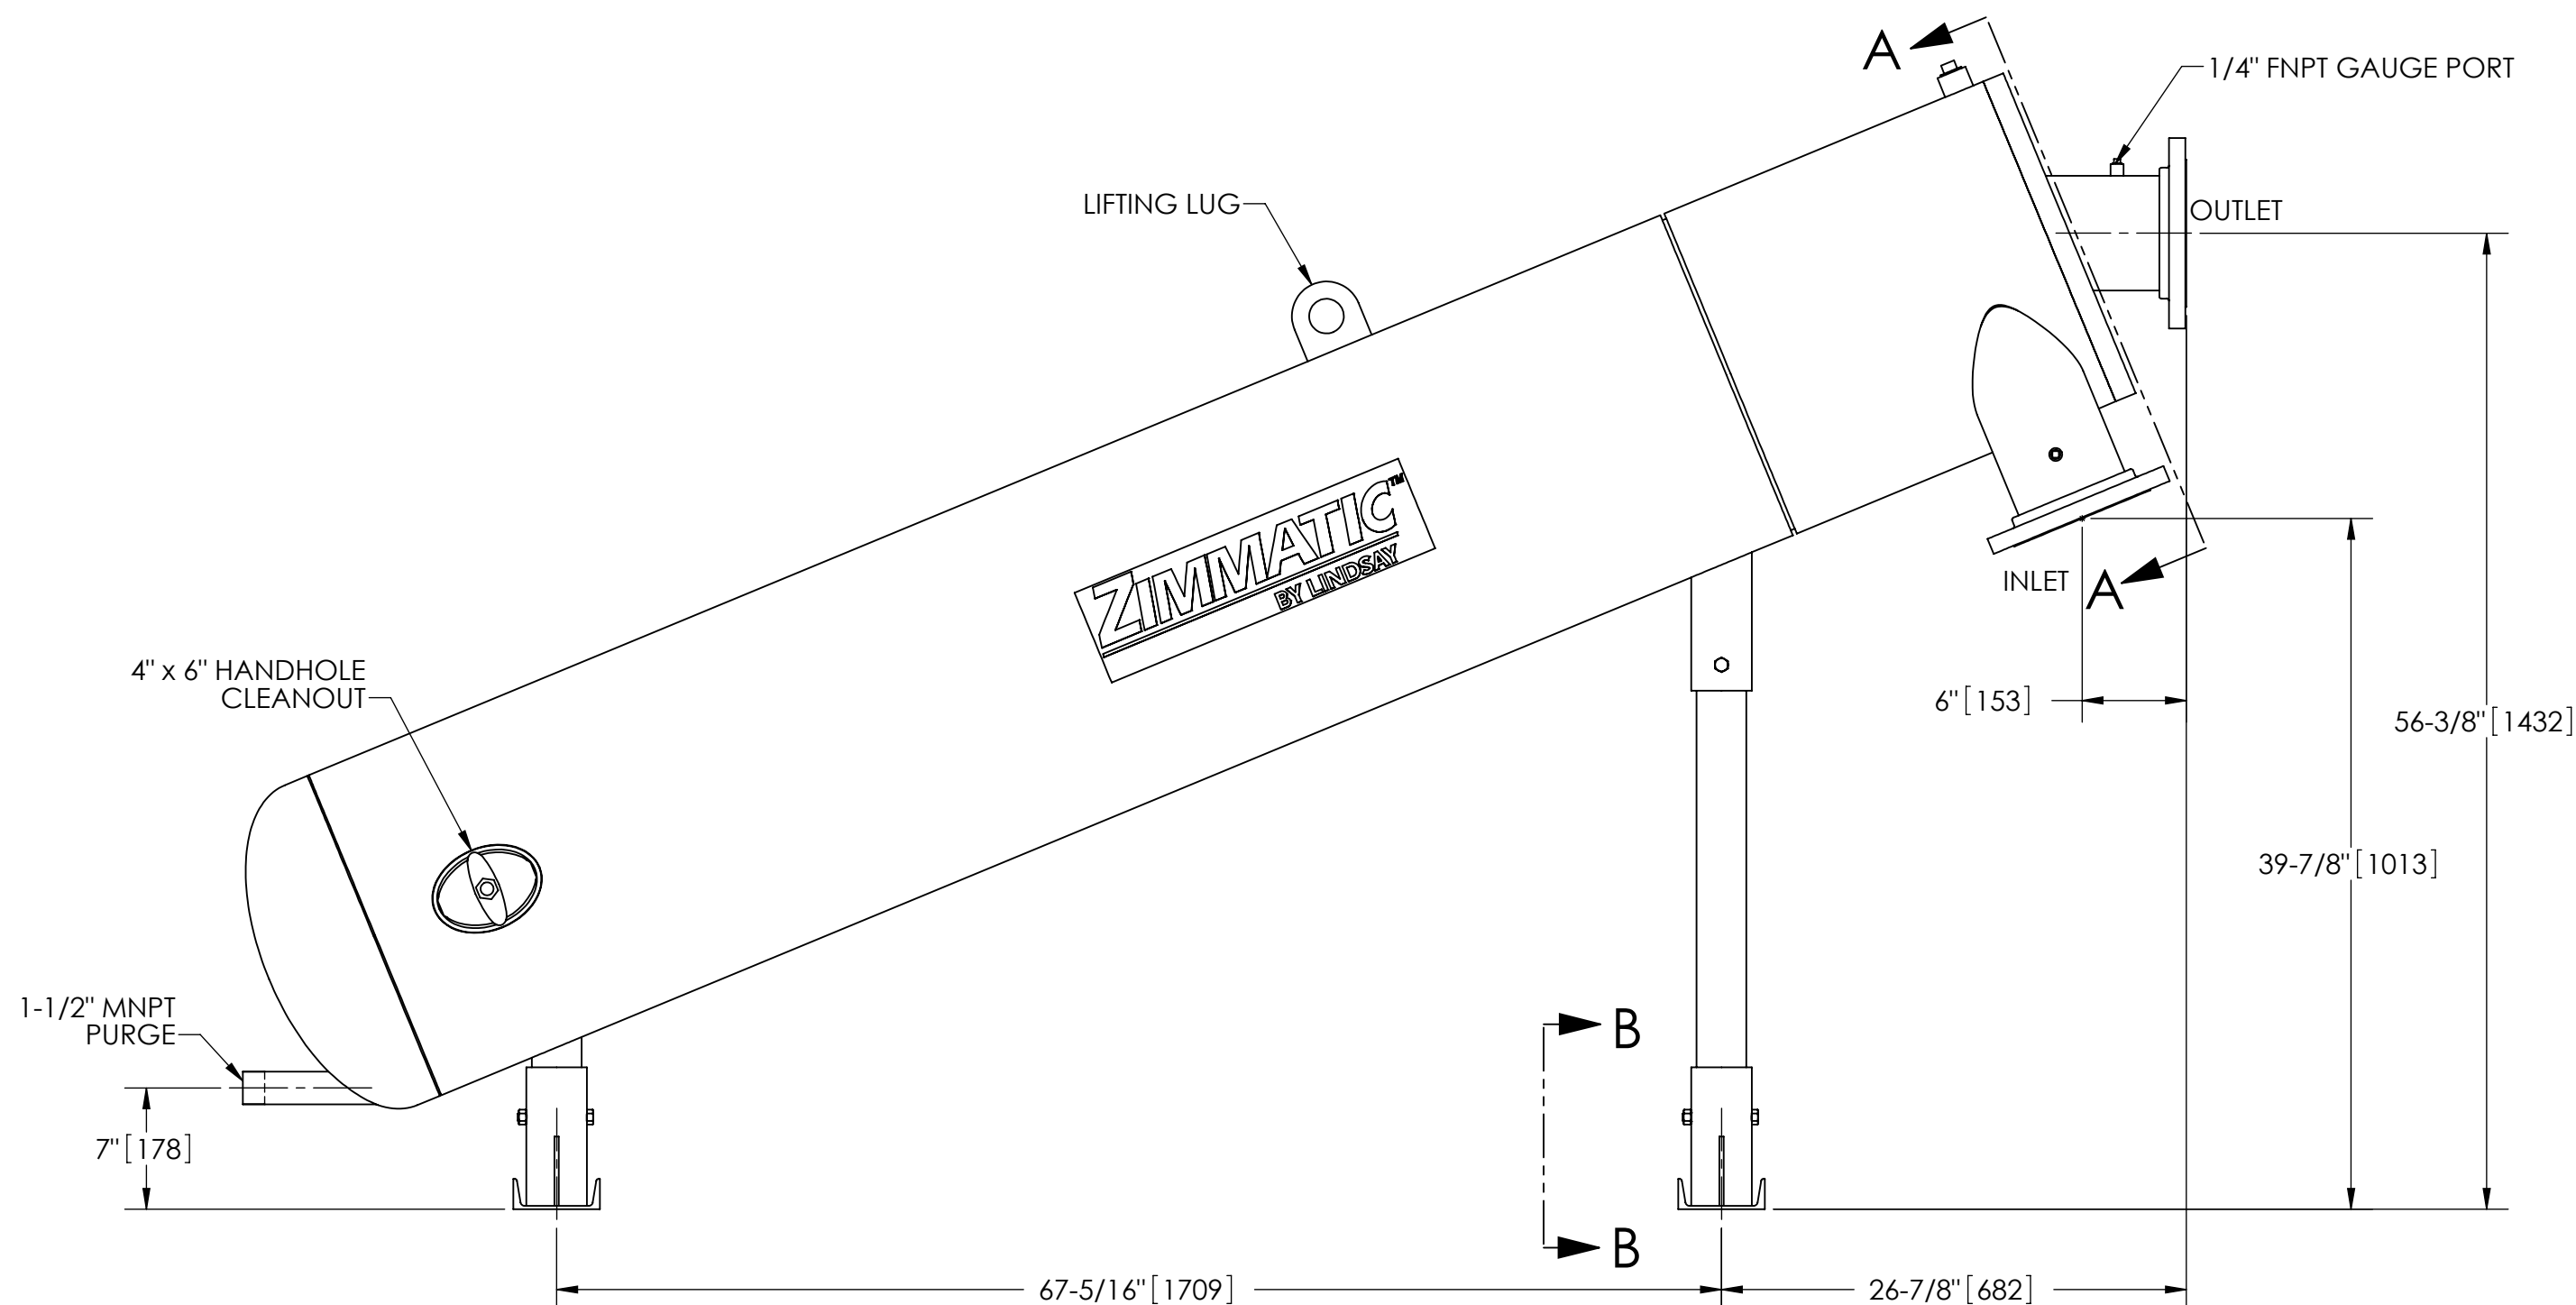

SECTION A-A

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN: INCHES (mm)  
TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
$\pm 1"$	.XX $\pm .01$	$\pm 1/4^\circ$
	.XXX $\pm .005$	
	.XXXX $\pm .0005$	

DO NOT SCALE DRAWING

MATERIAL	CLASS P-1 MILD CARBON STEEL
FINISH	POWDERCOAT LAKOS MEDIUM GRAY RAL-7005

ENGINEERED FOR: STANDARD	
APPROVALS	DATE
DRAWN CAG	1/30/12
ENGR	-
MFG	-
WORK ORDER	QTY.

<b>LAKOS.</b>		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM	
TITLE PWC-1060-L, SEPARATOR, 550-1200 GPM, CARBON STEEL			
SIZE C	MODEL NO.	DWG NO. 133379	REV. C
SCALE 1:10	EST. WT. 1128 lb	SHEET 1 OF 1	

DWG NO. 133379  
SHEET 1  
REV. C