


EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED

NOTES:

1. OUTLET: 10" NPT PIPE.
2. RATED FLOW: 1780-2420 gpm (404-550 m³/hr).
3. MINIMUM WELL I.D.: 17-1/4" (438 mm).
4. HEAD LOSS: 9-14 ft (2.7-4.3 m).
5. MINIMUM SBMERGENCE: 60 ft (18.4 m).
6. APPROXIMATE DRY WEIGHT: 576 lbs (261 kg).
7. FINISH: LAKOS GREEN (EXTERIOR ONLY).
8. IF UNIT IS NOT DIRECTLY CONNECTED TO PUMP INTAKE, SHROUD OR PACKERS ARE REQUIRED.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

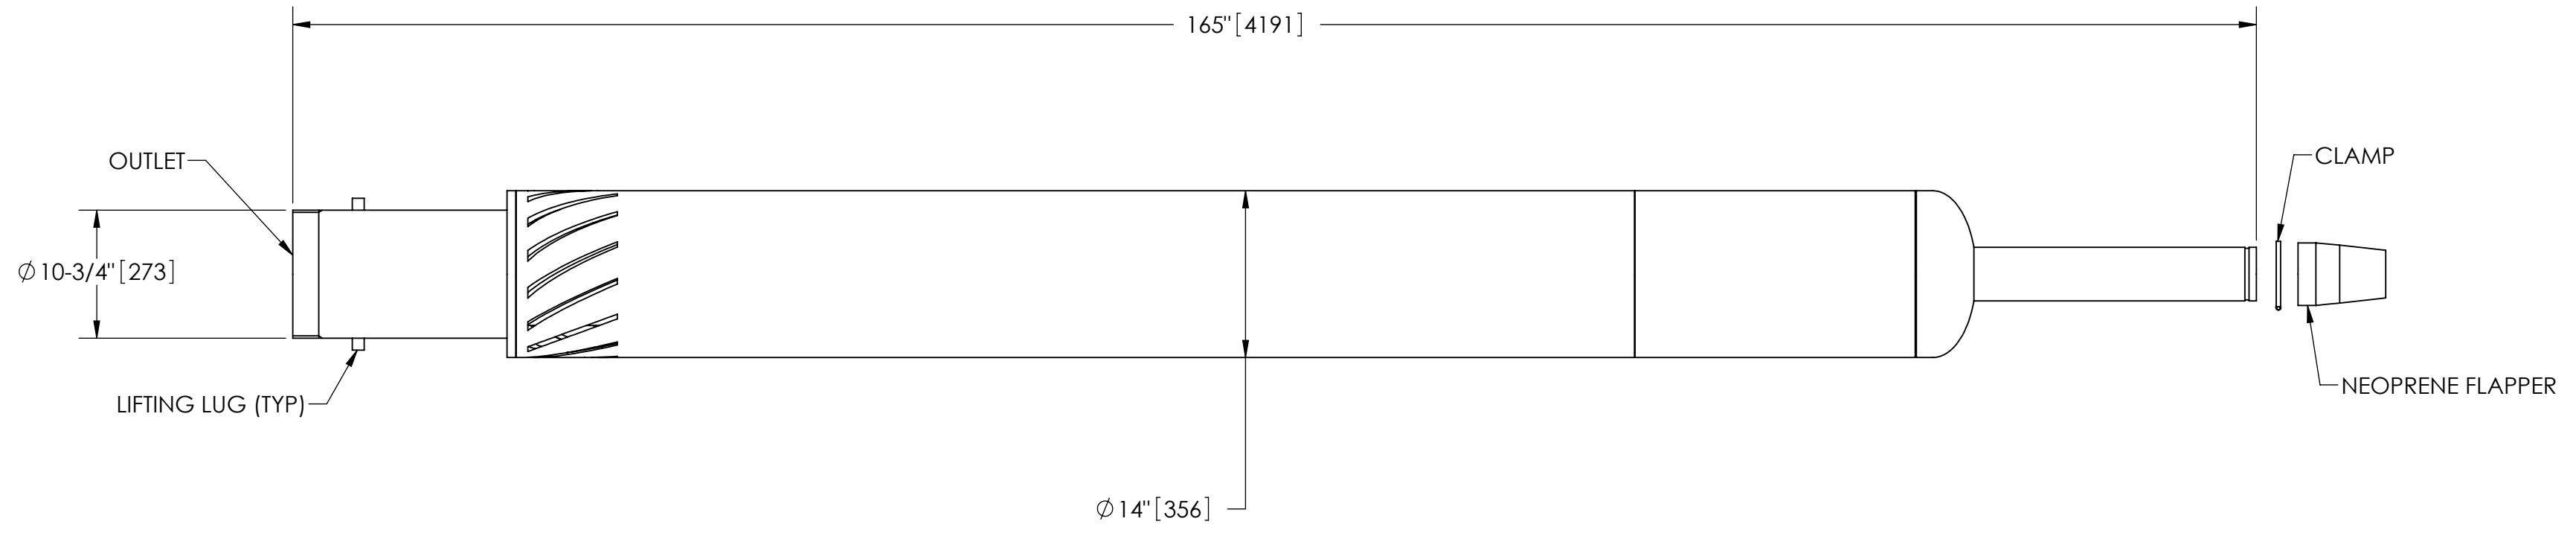

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1" .XX ± .01 ± 1/4° .XXX ± .005 .XXXX ± .0005		ENGINEERED FOR: STANDARD		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM		LAVAL UNDERGROUND SURVEYS	
DO NOT SCALE DRAWING		APPROVALS	DATE	TITLE			
MATERIAL CLASS P-1 MILD CARBON STEEL		DRAWN GroomC	09/02/08	PPS-KSA, SEPARATOR, 1780-2420 gpm, CARBON STEEL			
FINISH LAKOS GREEN		ENGR -	-	SIZE C	MODEL NO.	DWG NO. 107651	REV. D
		WORK ORDER	QTY.	SCALE 1:12	EST. WT. 576 lb	SHEET 1 OF 1	