


EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

NOTES:

1. OUTLET: 12" NPT PIPE.
2. RATED FLOW: 2520-3180 gpm (573-723 m<sup>3</sup>/hr).
3. MINIMUM WELL I.D.: 19-1/4" (489 mm).
4. HEAD LOSS: 9-14 ft (2.7-4.3 m).
5. MINIMUM SUBMERGENCE: 60 ft (18.4 m).
6. APPROXIMATE DRY WEIGHT: 787 lbs (357 kg).
7. FINISH: LAKOS GREEN (EXTERIOR ONLY).
8. IF UNIT IS NOT DIRECTLY CONNECTED TO PUMP INTAKE, SHROUD OR PACKERS ARE REQUIRED.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED

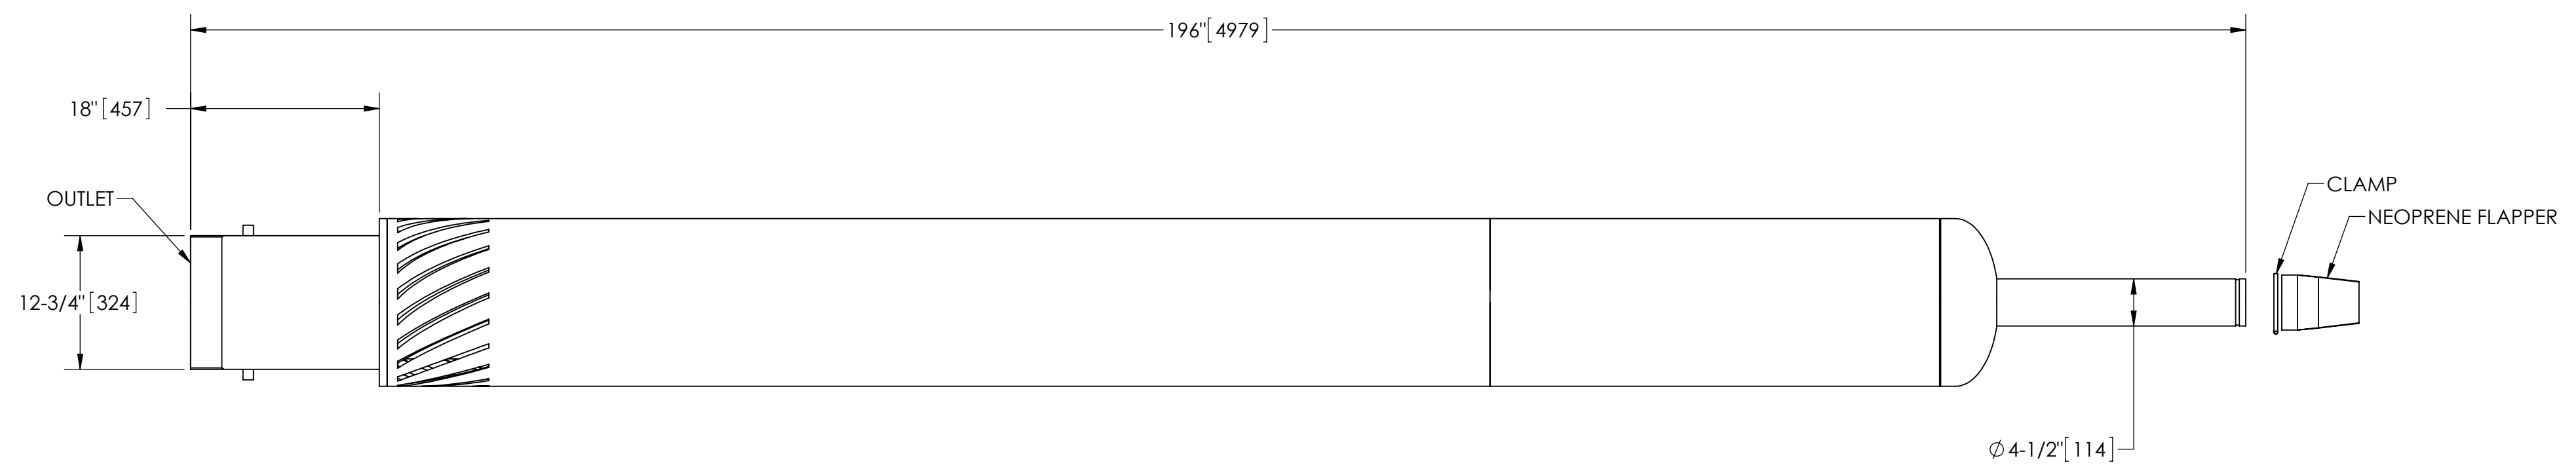

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE:		ENGINEERED FOR: <b>STANDARD</b>		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM		LAVAL UNDERGROUND SURVEYS		
FRACTIONS ± 1"	DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005	ANGLES ± 1/4°	APPROVALS	DATE	TITLE <b>PPS-KKA, SEPARATOR</b> 2520-3180 gpm, CARBON STEEL			
DO NOT SCALE DRAWING			DRAWN GroomC	9/02/08	SIZE C	MODEL NO.	DWG NO. <b>107650</b>	REV. D
MATERIAL CLASS P-1 MILD CARBON STEEL			ENGR -	-	SCALE 1:12	EST. WT. 787 lb	SHEET 1 OF 1	
FINISH SEE NOTES			MFG -	-				
			WORK ORDER	QTY.				