


EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED

NOTES:

1. OUTLET: 8" (203mm) NPT PIPE.
2. RATED FLOW: 880-1375 gpm (200-312 m³/hr).
3. MINIMUM WELL I.D.: 12" (305 mm).
4. HEAD LOSS: 9-14 ft (2.7-4.3 m).
5. MINIMUM SBMERGENCE: 60 ft (18.4 m)
6. APPROXIMATE DRY WEIGHT: 294 lbs (133 kg).
7. FINISH: LAKOS GREEN (EXTERIOR ONLY).
8. IF UNIT IS NOT DIRECTLY CONNECTED TO PUMP INTAKE, SHROUD OR PACKERS ARE REQUIRED.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

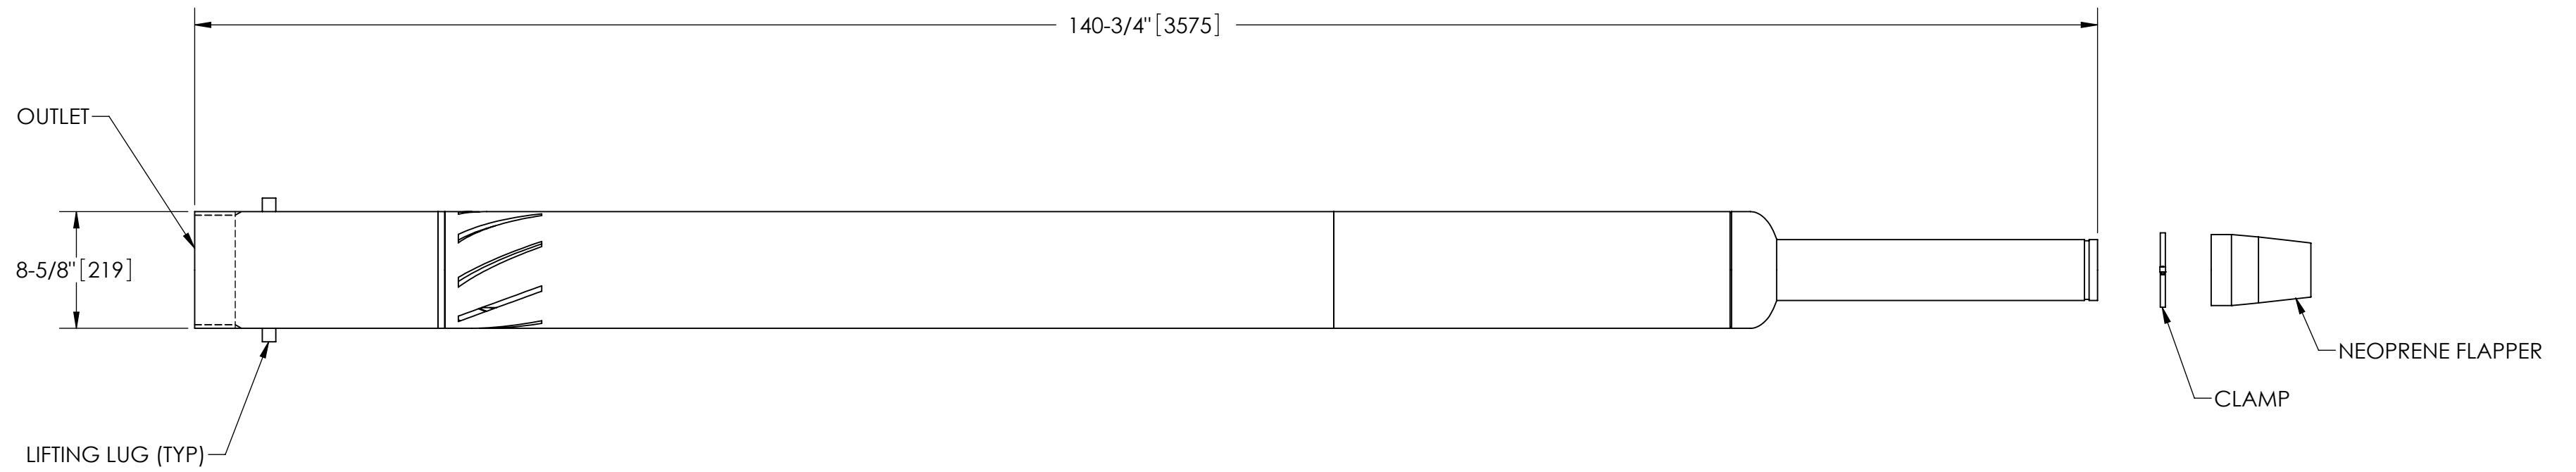

## SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE:		ENGINEERED FOR: <b>STANDARD</b>		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM		LAVAL UNDERGROUND SURVEYS	
FRACTIONS ± 1"	DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005	ANGLES ± 1/4°	APPROVALS	DATE	TITLE		
DO NOT SCALE DRAWING			DRAWN AMF	11/25/08	PPS-HHA, SEPARATOR		
MATERIAL CLASS P-1 MILD CARBON STEEL			ENGR JBI	11/25/08	880-1375 gpm, CARBON STEEL		
FINISH SEE NOTES			MFG -	-	SIZE C	MODEL NO.	DWG NO. 107643
			WORK ORDER	QTY.	SCALE 1:10	EST. WT. 294 lb	SHEET 1 OF 1

DWG. NO. 107643 SHEET 1 REV. B